

CSW-201GNは、高周波信号を50Ωのライン上で切り換える手動式の2接点同軸切替器です。

■ 特長

1. 本器は、高周波信号用として高周波特性を重視して設計された同軸切替器です。筐体は同軸構造を形成し、次の特性を有しています。
  - 周波数範囲が広い
  - 通過損失(挿入損失)が少ない
  - SWRが低い
2. 耐電力が大きく、発熱もありません。
3. 接触抵抗の軽減化を図るため、接点を金鍍金しています。

■ 付属品および取付方法と使用上の注意

本器には、タッピングビス(4×16)2本が付属されています。  
タッピングビスは、本器を机や壁面などに固定する場合ご使用ください。

- 本器は、切り換え操作時に一時的にオープン状態となります。(切り換えタイミング開放型)  
送信機を送信状態のまま切り換えますと、一時的に負荷のSWRが無限大となり、送信機を壊す恐れがあります。または、接点を傷めることとなりますので切り換え操作を行う場合は、必ず受信状態で切り換えて下さい。
- 本器は、性能向上のため開放されている接栓側をショート状態になる機構にしています。
- 接続ケーブルおよびコネクタは、品質の良い製品を使用し確実に接続して下さい。

The CSW-201GN is manual, double contact coaxial switch for switching high frequency signals on a line of 50 ohms.

■ FEATURES

1. This coaxial switch has been designed with special emphasis on high frequency characteristics for use as high frequency signals. It features:
  - Wide frequency range
  - Negligible insertion loss
  - Low S.W.R
2. It has a high withstand voltage and will not produce heat.
3. To attempt for the contact resistance to reduce, it makes a connector gold plating.

■ ACCESSORIES AND OPERATION

This equipment includes two tapping screws(4×16). Use the tapping screws to attach the equipment to wall. This unit goes temporarily into an open state during switching operations (switch timing open form).

If the transmitter is switched in the transmission state the load S.W.R. goes temporarily to unlimited and can permanently damage the transmitter as well as the contact points.



Always switch to the receiving state when carrying out switching operations.

This unit has done the opened side of the connector to the mechanism which becomes an short-circuiting state because of the performance improvement.

Use only superior quality parts for the connecting cable and the connector and make sure they are properly connected.

■ 定格 SPECIFICATIONS

		CSW-201GN	
周波数範囲	Frequency Range	DC ~ 1,800 MHz	
挿入損失	Insertion Loss	DC ~ 1,800 MHz	0.12 dB 以下
最大通過電力	Rating Power	1,600 W (PEP) at DC ~ 30 MHz	500 W (PEP) at 30 ~ 600 MHz
		150 W (PEP) at 600 ~ 1,800 MHz	
切替回路数	Switching Circuit	1回路2接点 Single pole two output position	
入出力インピーダンス	Impedance	50 Ω	
S. W. R		DC ~ 600 MHz	1.2 以下
		600 ~ 1,800 MHz	1.3 以下
アイソレーション	Isolation	DC ~ 600 MHz	60 dB 以上
		600 ~ 1,800 MHz	45 dB 以上
入出力接栓	Connectors	N-J	
外形寸法	Dimensions	72 (W) × 78 (L) × 47 (H) mm	
重量	Weight	430 g	

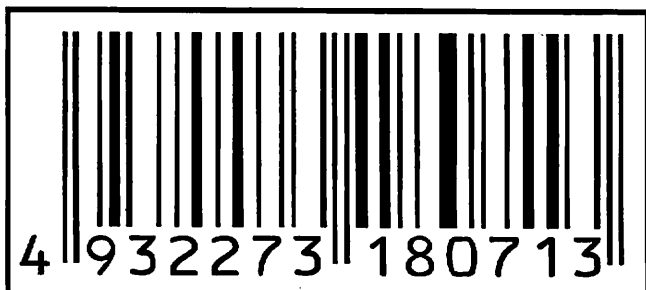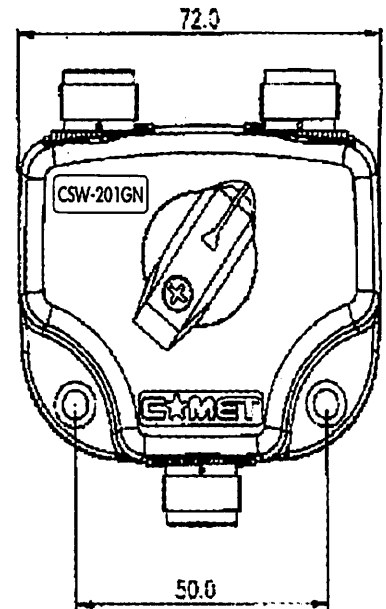

**☆MET CO., LTD**

埼玉県さいたま市南区辻4-18-2

TEL 048-839-3131 FAX 048-839-3136